

# Continuous Plastic Molded Headers

**Programmable AutoTrimmer**



**Adjustable Manual Cutter**



## Autosplice Continuous Interconnect For Maximum Flexibility

AutoHeader connector products are supplied in reeled format for cut-to-size and placement onto PC boards automatically. Both solder tail and compliant eye-of-needle terminations are available in a wide range of pin and blade sizes on different centerline spacings. Custom products are easily produced for many standard Telecom, Computer and Automotive USCAR socket connectors. A programmable AutoTrimmer™ and an adjustable manual cutter are available to cut headers to discrete sizes. Pre-cut headers can be supplied from the factory packaged in tubes, trays or tape & reel.

## Authorized Distributors



800.325.0534  
Contact Casey Donovan  
cdonovan@keiconn.com



Performance. Trust. Innovation.

800.400.7041  
contact@heilind.com



To obtain a sample kit contact us at:  
sales@autosplice.com

## Autosplice Worldwide



Autosplice, Inc.  
10121 Barnes Canyon Road  
San Diego, CA 92121  
USA  
Tel: (858) 535-0077  
E-mail: sales@autosplice.com



Autosplice Mexico, S. de R.L. de C.V.  
Cartagena 18960 Plant 1 & 2  
El Ponvenir, Tijuana, BC 22224  
Mexico  
Tel: 52 664 625 8796  
E-mail: sales@autosplice.com



Autosplice Europe GmbH  
Muhlsteig 2,  
90579 Langenzenn  
Germany  
Tel: 09101 / 9014 - 0  
E-mail: info@autosplice.de



Autosplice Japan  
3-7-39 Minami Cho,  
Higashi Kurume Shi  
Tokyo 203-0031 Japan  
Tel: 81 424 62 8481  
E-mail: info@autosplice.co.jp



Autosplice Asia Pte, Ltd.  
Redhill Industrial Estate  
1002 Jalan Bukit Merah, Unit #05-13 to 20,  
Singapore 159456  
Tel: 65 6276 8223  
E-mail: sales@autospliceasia.com.sg



Autosplice Paramount  
7551 Rosecrans Ave.  
Paramount, CA 90723  
USA  
Tel: (858) 535-0077  
E-mail: sales@autosplice.com



Autosplice Industria E Comercio  
Rua Laguna 79, Jardim Platina  
CEP 06273-140, Osasco  
Sao Paulo, Brazil  
Tel: 55 11 3601 4445  
E-mail: conect@autosplice.com.br



Autosplice Brittanica Ltd.  
Units 1-5 Crompton Road Industrial Estate  
Ilkeston, Derbyshire DE7 4BG  
United Kingdom  
Tel: 49 9102 9957 0  
E-mail: info@autosplice.de



Autosplice Korea  
Namdong Industrial Complex  
117 Block 2, Lot 686-13, Gojan-Dong,  
Namdong-Gu, Incheon City, South Korea  
Tel: 82 32 812 9784  
E-mail: info@autosplice.co.kr



Autosplice Electronics Ltd.  
No. 17 Chuang Xin Road 1,  
Xia Ling Bei Industrial Estate,  
Liao Bu Town, Guang Dong Province, China  
Tel : 0769-83525370  
E-mail: sales@autosplicechina.com

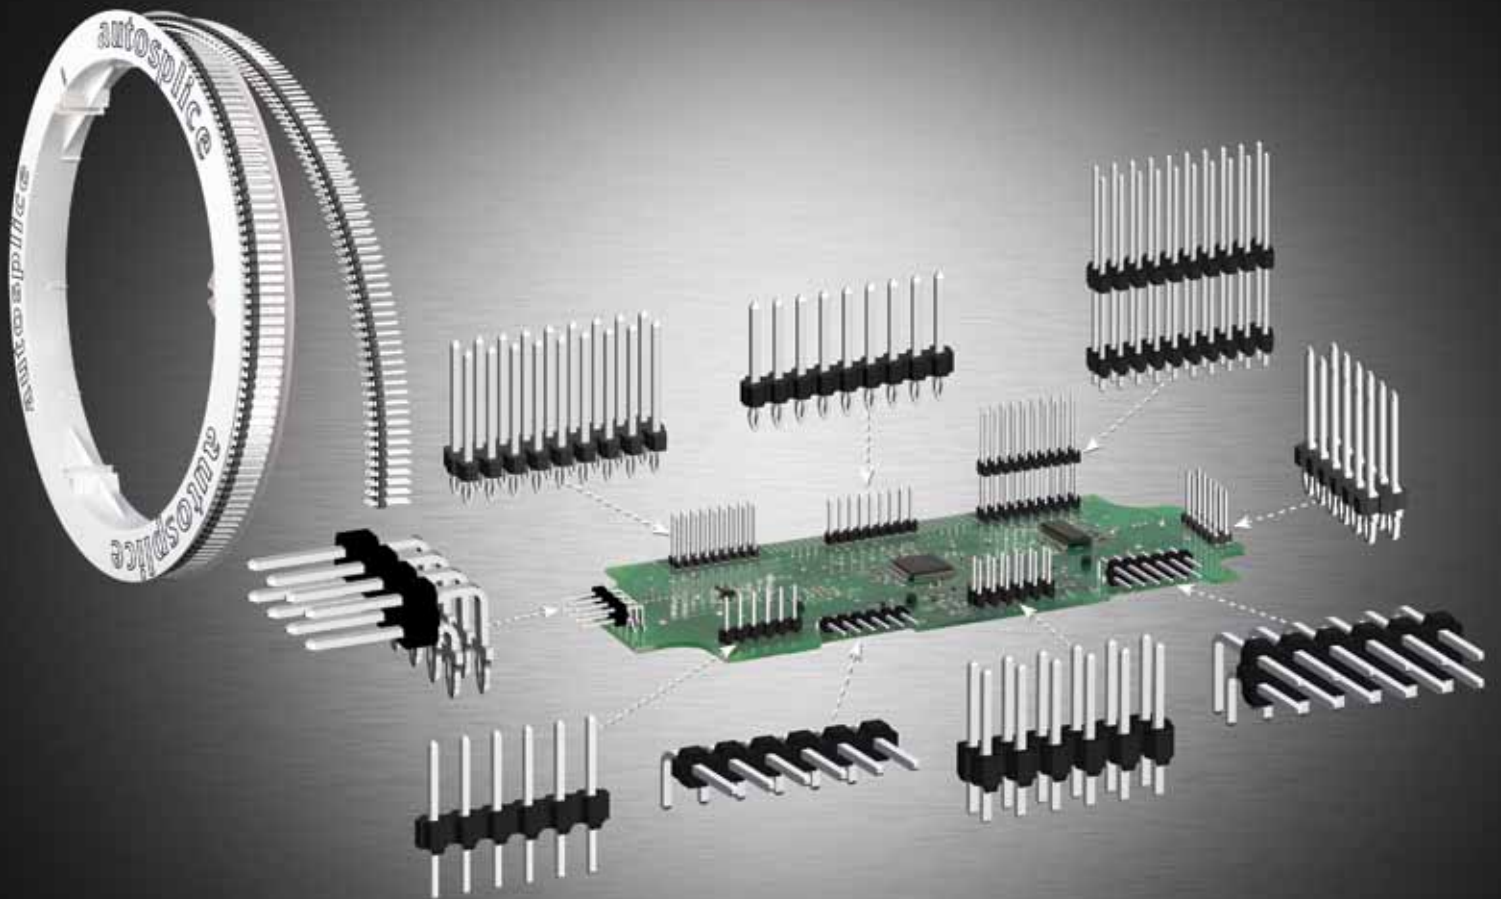


Innovative Interconnections™


www.autosplice.com


sales@autosplice.com


# AutoHeader™ Technology





# Soldertail Selection Guide

23-1012 AutoHeader™ Dual row 2.54mm (.100) spacing, Solder Tail			Standard Pin Dimensions. **					Standard	Plating ##	
	.025 Pin Square	.025 Pin Round	Number of Positions	A = .230 B = .120	A = .318 B = .125	A = .230 B = .110	A = .240 B = .120	A = .318 B = .135	Tin/Lead	Matte Tin (Lead Free)
	D	K	Enter Number Of Positions (00 if complete reel)	A1	A2	A3	A4	A5	AA	TT

23-1008 AutoHeader™ Single row 2.54mm (.100) spacing, Solder Tail			Standard Pin Dimensions. **					Standard	Plating ##	
	.025 Pin Square	.025 Pin Round	Number of Positions	A = .230 B = .120	A = .318 B = .125	A = .230 B = .110	A = .240 B = .120	A = .318 B = .135	Tin/Lead	Matte Tin (Lead Free)
	D	K	Enter Number Of Positions (00 if complete reel)	A1	A2	A3	A4	A5	AA	TT

23-1070 AutoHeader™ Dual row Dual insulator 2.54mm (.100) spacing, Solder Tail			Standard Pin Dimensions. **					Standard	Plating ##	
	.025 Pin Square		Number of Positions	Contact Factory					Tin/Lead	Matte Tin (Lead Free)
			Enter Number Of Positions (00 if complete reel)						AA	TT

23-1035 AutoHeader™ Single row 5.25mm (0.207") spacing, Solder Tail			Standard Pin Dimensions. **					Standard	Plating ##	
	.110 x .031 Blade		Number of Positions	Contact Factory					Tin/Lead	Matte Tin (Lead Free)
	T		Enter Number Of Positions (00 if complete reel)						AA	TT

23-1051 AutoHeader™ Single row 3.96mm (0.156") spacing, Solder Tail			Standard Pin Dimensions. **					Standard	Plating ##	
	.045 Pin Square		Number of Positions	A = .575 B = .125	A = .375 B = .125				Tin/Lead	Matte Tin (Lead Free)
	R		Enter Number Of Positions (00 if complete reel)	A1	A2				AA	TT


Selection Guide Example:


Single Row 0.100 center Solder Tail: 23-1008  
 0.25 square Pin: D  
 10 position: 10  
 Pin length A = .230 B = .110: A3  
 Plating Finish - Tin lead: AA


Selected Part Number: 23-1012D10A3AA


\*\* Other Pin Dimensions available. Contact factory  
 ## Other Plating options available. Contact factory


# Compliant Pin Selection Guide


23-1047 AutoHeader™ Dual row 2.54mm (.100) spacing, Compliant Pin			Standard Pin Dimensions. **					Standard	Plating ##
	.025 Pin Square	Number of Positions	Z = .419	Z = .437	Z = .531	Z = .604	Z = .585	Tin/Lead	Matte Tin (Lead Free)
	D	Enter Number Of Positions (00 if complete reel)	A1	A2	A3	A4	A5	AA	TT


23-1045 AutoHeader™ Single row 2.54mm (.100) spacing, Compliant Pin			Standard Pin Dimensions. **					Standard	Plating ##
	.025 Pin Square	Number of Positions	Z = .419	Z = .437	Z = .531	Z = .604	Z = .585	Tin/Lead	Matte Tin (Lead Free)
	D	Enter Number Of Positions (00 if complete reel)	A1	A2	A3	A4	A5	AA	TT

23-1040 AutoHeader™ Single row 2.54mm (.100) spacing, Compliant Pin			Standard Pin Dimensions. **			Plating ##
	.0394 x .0250 Pin	Number of Positions	Z = .419	Z = .437	Z = .531	Tin/Lead
	R	Enter Number Of Positions (00 if complete reel)	A1	A2	A3	AA

23-1042 AutoHeader™ Dual row 2.54mm (.100) spacing, Compliant Pin			Standard Pin Dimensions. **			Plating ##
	.0394 x .0250 Pin	Number of Positions	Z = .419	Z = .437	Z = .531	Tin/Lead
	R	Enter Number Of Positions (00 if complete reel)	A1	A2	A3	AA

23-1056 AutoHeader™ Single row 5.00mm (.197) spacing, Compliant Pin			Standard Pin Dimensions. **			Plating ##	
	.110 x .031 Pin	Number of Positions	Contact Factory			Tin/Lead	Matte Tin (Lead Free)
	T	Enter Number Of Positions (00 if complete reel)				AA	A1

Contact Factory AutoHeader™ Dual row Right Angle 2.54mm (.100) spacing, Compliant Pin			Standard Pin Dimensions. **			Plating ##	
	.025 Pin Square	Number of Positions	Contact Factory			Tin/Lead	Matte Tin (Lead Free)
	R	Enter Number Of Positions (00 if complete reel)				AA	TT

Contact Factory AutoHeader™ Single row 2.54mm (.100) spacing, Compliant Pin			Standard Pin Dimensions. **			Plating ##	
	.025 Pin Square	Number of Positions	Contact Factory			Tin/Lead	Matte Tin (Lead Free)
	T	Enter Number Of Positions (00 if complete reel)				AA	TT