

NOTES: UNLESS OTHERWISE SPECIFIED

1. INTERPRET DRAWING IN ACCORDANCE WITH ANSI Y14.5-1982.

2 MATERIAL: C21000 BRASS, (EXTRA SPRING).

3 FINISH: POST-PLATE, 0.0030[.000120] MIN 90/10 TIN-LEAD, OVER 0.0010[.000050] MIN NICKEL.

4. ALL DIMENSIONS APPLY AFTER PLATING.


5. 0.10[.004] MAX BLANKING BURR PERMISSIBLE. BURRS MUST NOT EXCEED THE SPECIFIED FEATURE TOLERANCE. BURR SIDE FACES HUB.

6. 0.13[.005] MAX RADII & FILLETS PERMISSIBLE ON ALL CORNERS.

7 QUANTITY OF PARTS PER REEL: 25,000 ONE BREAK NOT LESS THAN 25% OF REEL CAPACITY AND NO SPLICES ALLOWED WITHIN A REEL. NO TAPE TO BE USED ON REEL.

8. RECOMMENDED DRILL HOLE SIZE: $\phi 1.09 \pm 0.03$ [$\phi 0.43 \pm 0.01$] WITH 1oz COPPER PLATING: $\phi 0.99 \pm 0.05$ [$\phi 0.39 \pm 0.02$] TIN/LEAD FINISHED HOLE: $\phi 0.97 \pm 0.05$ [$\phi 0.38 \pm 0.02$]

REV	REVISION RECORD	ECN	BY	APVD	DATE
A	INITIAL RELEASE PER ECN 14171	14171	MAC	JB	06-30-96
B	NEW RELEASE PER EWR 100067	500037	TM	JB	11-3-99
C	CHGD NOTE # 3 TO "POST-PLATE"	500224	TM	JB	02-09-00
D	VENDOR REQUEST PER EWR 100849	501026	TM	JB	10-26-00

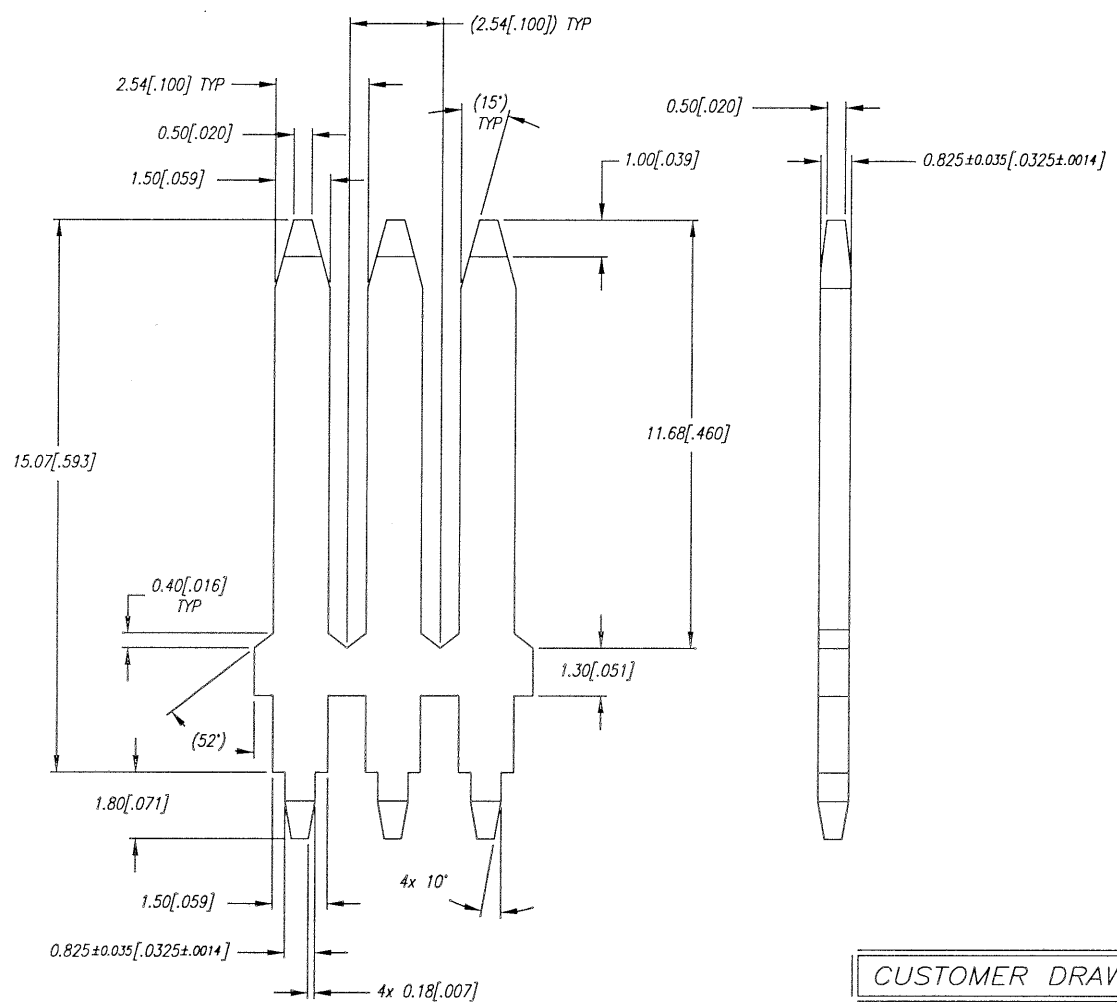

7 WINDING INSTRUCTION
14" CARDBOARD REEL, P/N 52-2339-6 OR EQUIV.



SHIP TO CUSTOMER (BURR SIDE FACING REEL CENTER)

CUSTOMER DRAWING

This drawing and the information set forth hereon are the property of Autossplice, Inc. and are to be held in trust and confidence. Publication, duplication, disclosure, or use for any purpose not expressly authorized in writing by Autossplice, Inc. is prohibited.

MATERIAL	2
FINISH	3

TOLERANCES UNLESS OTHERWISE SPECIFIED DIM IN INCHES	DECIMAL: XX ±0.5 [XX] ±[.02] X.XX ±0.25 [.XXX] ±[.010] ANGULAR: ±5' ◇ DENOTES SPECIAL CHARACTERISTIC		AUTOSPLICE INC. 10121 Barnes Canyon Road San Diego, California 92121 (619) 535-0077
THIRD ANGLE PROJECTION	DATE: 11-03-99	DRAWN BY: MacKay	ENGINEERED BY: BIANCA
TITLE: TERMINAL			
SIZE: C	PCHK NO: OAE89	DRAWING NUMBER: C7-30050-8	REVISION: D
SCALE: 10:1	CAD FILE NO: C7-30050-8D.DWG	SHEET 1 OF 1	