

NOTES: UNLESS OTHERWISE SPECIFIED

- INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.
- RECOMMENDED .062" THICK HASL PC BOARD COMPLIANT HOLE:
 DRILLED HOLE - $\varnothing .0453 \pm .0010$ [$\varnothing 1.151 \pm 0.025$]
 COPPER PLATED - $\varnothing .041 \pm .002$ [$\varnothing 1.041 \pm 0.051$]
 TIN-LEAD PLATED - $\varnothing .040 \pm .003$ [1.02 ± 0.08]
 RECOMMENDED .062" THICK ENIG PC BOARD COMPLIANT HOLE:
 DRILLED HOLE - $\varnothing .0453 \pm .0010$ [$\varnothing 1.151 \pm 0.025$]
 COPPER PLATED - $\varnothing .041 \pm .002$ [$\varnothing 1.041 \pm 0.051$]
 Au/Ni PLATED - $\varnothing .041 \pm .002$ [1.041 ± 0.051]

PART NO. / ORDERING CODE

23-1063 D [] [] [] [] [] []

TYPE
 1 ROW, RIGHT ANGLE
 .100 [2.54] CENTERS

VARIATION
 OMIT FOR STANDARD

SQ. PIN COMPLIANT
 .025 SQ
 [0.64]

FINISH
 TT = $40\mu\text{m} - 80\mu\text{m}$ [$1.02\mu\text{m} - 2.03\mu\text{m}$] MATTE Sn (Pb FREE)
 OVER $80\mu\text{m}$ [$2.03\mu\text{m}$] MIN Ni.

TOTAL NO. OF PINS





DIMENSION

CUT HEADER SIZES:
 2 TO 20 POSITIONS
 PACKAGED IN TRAYS
 POS = QTY / TRAY
 6 = $400 \pm 10\%$

CODE	"A"	"B"
A1	.361 \pm .010 [9.16 \pm 0.25]	.195 [4.95]

ADDITIONAL PIN SIZES & LENGTHS CAN BE
 MADE UPON REQUEST

REV	REVISION RECORD	ECN	BY	APVD	DATE
X1	RELEASED PER EWR# 107294	-	RAB	PVB	07/18/11
A	REL'D FOR PRODUCTION EWR107478	506282	KR	KR	02/22/12

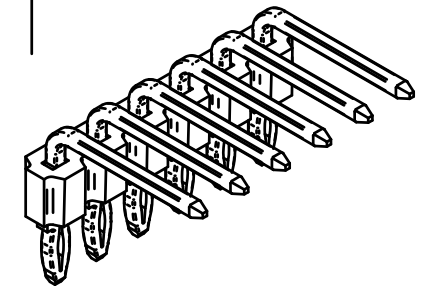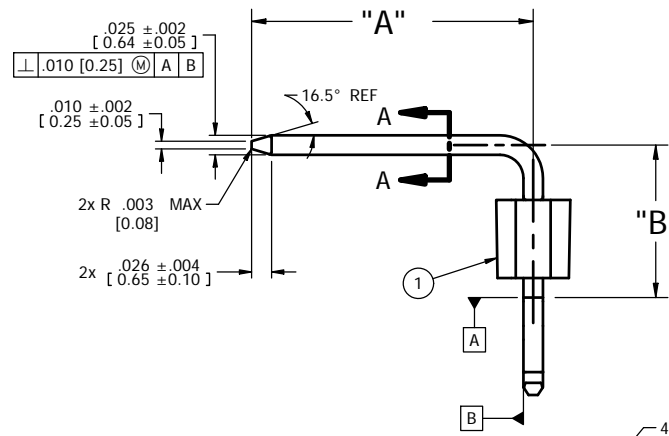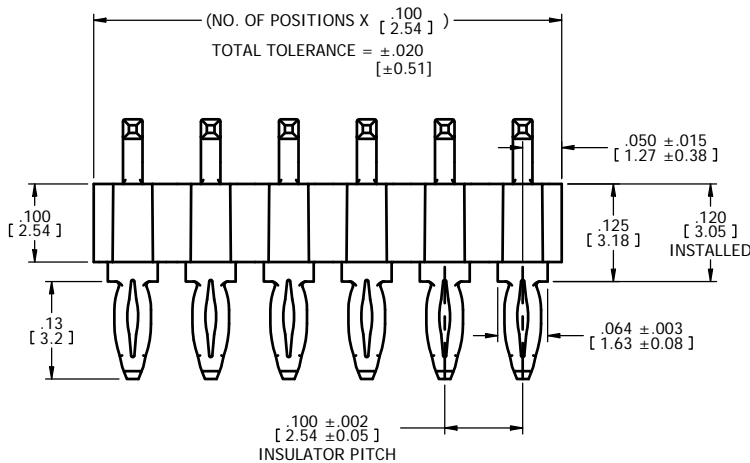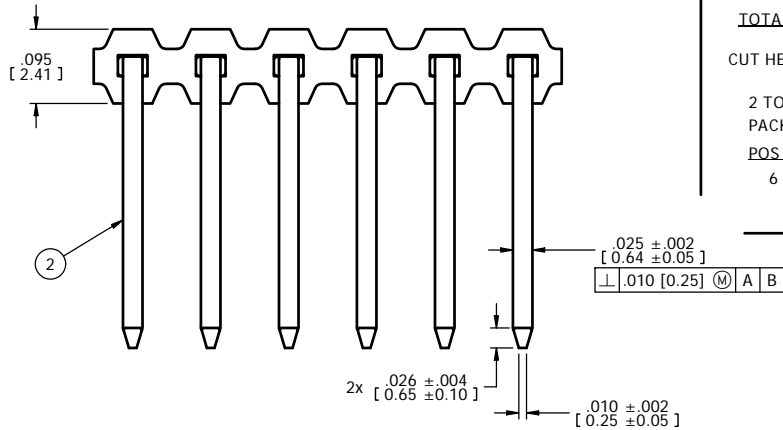

MATERIAL:

- ① **INSULATOR:**

GLASS FILLED THERMOPLASTIC POLYESTER
 FLAMMABILITY RATED: UL 94HB
 COLOR: BLACK

- ② **TAB:**

COPPER ALLOY

FINISH:

SEE PART NUMBER ORDERING CODE

CONFIDENTIAL
CUSTOMER DRAWING

P/N 23-1063D06A1[] [] [] [] [] [] SHOWN

SECTION A-A

The drawing and the information set forth herein are the property of Autosplice, Inc. and are to be held in trust and confidence. Publication, disclosure, or use for any purpose not expressly authorizing in writing by Autosplice, Inc. is prohibited.

		<small>Autosplice, Inc. 10121 Barnes Canyon Rd. San Diego, CA 92121-0725 619-535-0077</small>	
<small>TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES</small> DECIMAL: .XX = \pm .01 [X.X] = \pm [0.3] .XXX = \pm .005 [XXX] = \pm [0.13] ANGULAR: \pm 5°	<small>THIRD ANGLE PROJECTION</small> 	<small>DRAWN BY</small> RIEK	<small>DATE</small> 2/22/12
<small>ENGINEERED BY</small> PVB	<small>DATE</small> 2/22/12	<small>TITLE</small> AUTOHEADER™ RT ANGLE, 1 ROW, COMPLIANT	<small>REVISION</small> NONE
<small>SIZE</small> C	<small>ORIGIN NUMBER</small> OAE89	<small>MODEL NUMBER</small> C23-1063D[] [] [] [] [] []	<small>SCALE</small> 8:1