



REV	REVISION RECORD	ECN	BY	APPROV	DATE
X3	DRAWING REVIEW	-	TML JB	TCB	08/28/12
A	PRODUCTION RELEASE PER ENR 100694	500862	TML JB	TCB	08/28/12
B	ADDED TT FINISH	122-01	LD	LD	08/28/12

- NOTES: UNLESS OTHERWISE SPECIFIED
 1. INTERPRET DRAWING IN ACCORDANCE WITH ANSI Y14.5-1982.
 2. MATERIAL: C26000 BRASS, 1/2 HARD, .032±.001 THICK. ◇
 3. FINISH:
 AA: POST-PLATED .000120" [0.0030] MIN 90/10 TIN-LEAD OVER .000050" [0.0010] MIN NI;
 TT: POST-PLATED .000160" [0.0041] MIN Sn-Pb FREE OVER .000080" [0.0020] MIN NI.
 4. ALL DIMENSIONS APPLY AFTER PLATING.
 5. .004[0.10] MAX BLANKING BURR PERMISSIBLE. BURRS MUST NOT EXCEED THE SPECIFIED FEATURE TOLERANCE.
 6. .005[0.13] MAX RADI & FILLETS PERMISSIBLE ON ALL CONNERS.
 7. QUANTITY OF PARTS PER REEL: 20,000 ONE BREAK AND NO SPLICES ALLOWED WITHIN A REEL. NO TAPE TO BE USED ON REEL.
 8a). RECOMMENDED PTH DRILL SIZE: ϕ .043±.001 [1.09±0.03] WITH 1oz. COPPER PLATING: ϕ .039±.002 [0.99±0.05] TIN/LEAD FINISHED HOLE: ϕ .038±.002 [0.97±0.05]
 8b). RECOMMENDED PUNCHED HOLE SIZE: ϕ .039±.002 [0.99±0.05]
 9. CON PERMISSIBLE IN AREA SHOWN TO ACHIEVE DIAGONAL RQMT.

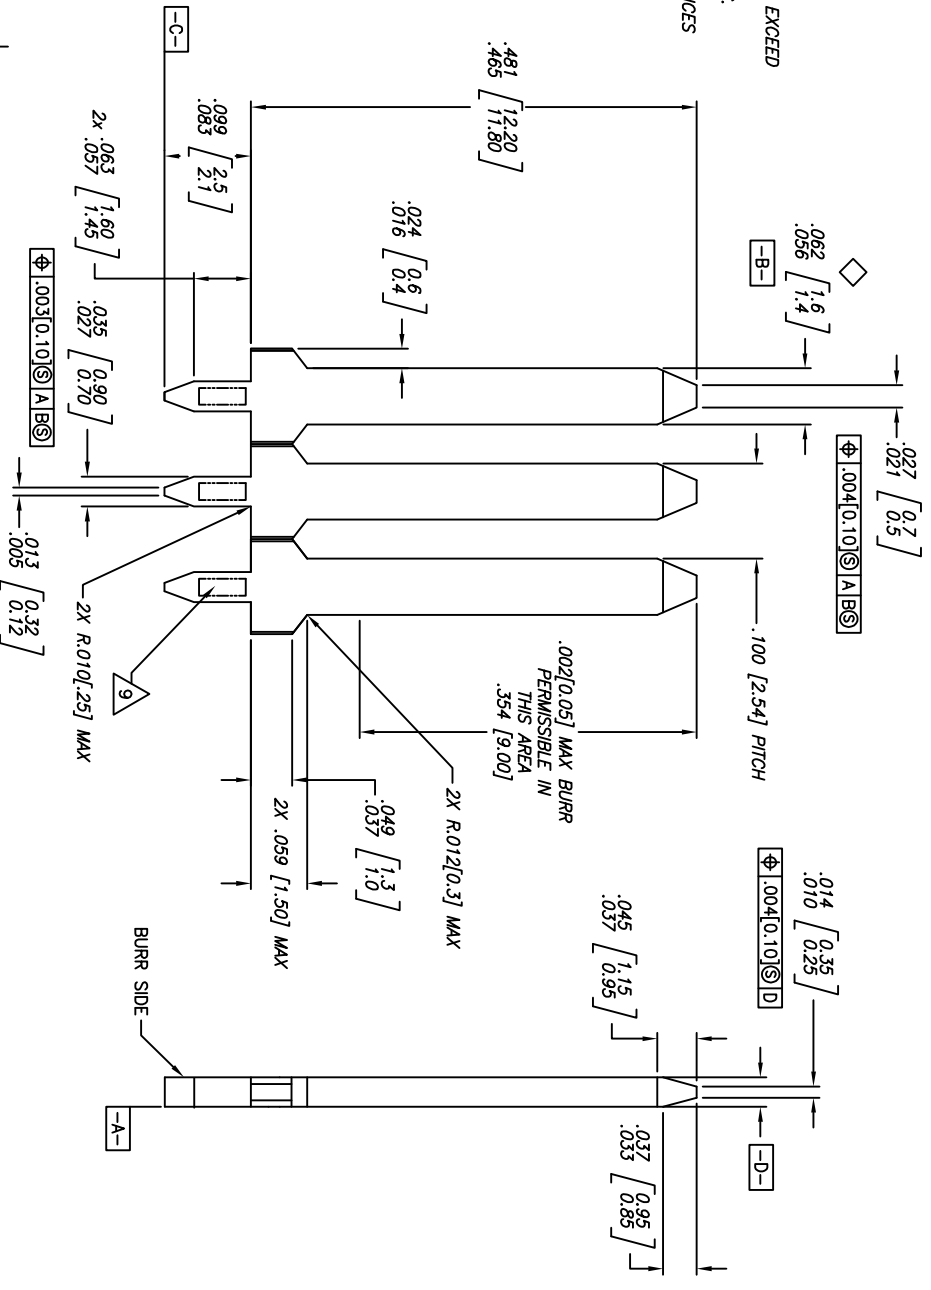

WINDING INSTRUCTION
 REEL, CARDBOARD OR EQUIVALENT

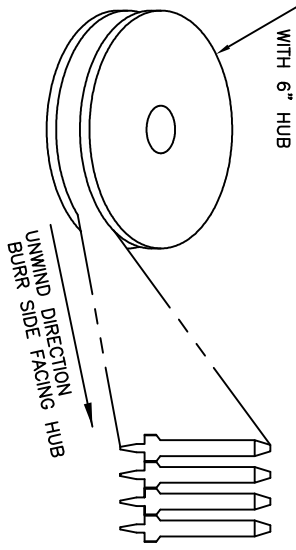

This drawing and the information set forth herein are the property of AutosplICE, Inc. and are to be held in trust and confidence. Publication, duplication, disclosure, or use for any purpose not expressly authorized in writing by AutosplICE, Inc. is prohibited.

TOLERANCES	MATERIAL	FINISH	ANGULAR	CHAMFER
DECIMAL: XX ±.02 [X.X] ±[0.5] .XXX ±0.10 [X.XX] ±[0.25]	2	3	±Z	IGNORES SPECIAL CHARACTER

CUSTOMER DRAWING

AutosplICE AUTO SPLICE INC.
 10121 BROAD ROAD
 SAN DIEGO, CALIFORNIA 92121
 (619) 595-0077
 FAX: (619) 595-0077
 WWW: WWW.AUTOSPICE.COM
 DESIGNED BY: MACKAY
 DRAWN BY: BLANCA
 DATE: 07-24-00
 SIZE: 01-24-00
 TITLE: VERTICAL TERMINAL
 PART NO: C7-V1038-0021
 REV: B
 SHEET 1 OF 1