

NOTES: UNLESS OTHERWISE SPECIFIED

1. INTERPRET DRAWING IN ACCORDANCE WITH ANSI Y14.5-2009.
2. SUPPLIED IN REEL FORM AND CUT TO LENGTH. CONTINUOUS HEADER TO BE TRAVERSE WOUND 4,000 TABS PER AUTOHEADER REEL. 2 SPLICES MAX PERMITTED PER REEL, FEEDER COMPATIBLE SPLICES PERMITTED.
3. 0.08 [.003] BLANKING BURR ON TAB.
4. DIMENSIONS INDICATED ARE TO BE MEASURED WITH INSULATOR RESTRAINED FLAT ON DATUMS C AND D OVER 4 POSITIONS.
5. FEEDER CUTOFF FROM CONTINUOUS STRIP.

PART NO. / ORDERING CODE

23-1080

TYPE
1 ROW 5.00 (.197)
CENTERS

TAB SIZE/SHAPE

T-SIZE / RECTANGULAR

.0315 X .110
(0.80) (2.80)



FINISH
TT= 160μ" (4.06 MICRONS) MIN.
MATTE TIN OVER 80μ"
(2.03 MICRONS) MIN. NICKEL

DIMENSIONS				
DIM. CODE	A	B	C	D
A1	12.25 [.482]	14.16 [.557]	16.70 [.657]	19.30 [.760]

2 00-CONTINUOUS REEL

CUT HEADER SIZES:
01 - 04 POSITIONS
BULK PACKAGED

REV	REVISION RECORD	ECN	BY	APVD	DATE
X1	INITIAL DESIGN	-	LD	LD	12/03/13
A	INITIAL DESIGN	506746	LD	LD	01/09/14
B	INSERTION HEIGHT CHANGE	506955	LD	LD	11/21/14

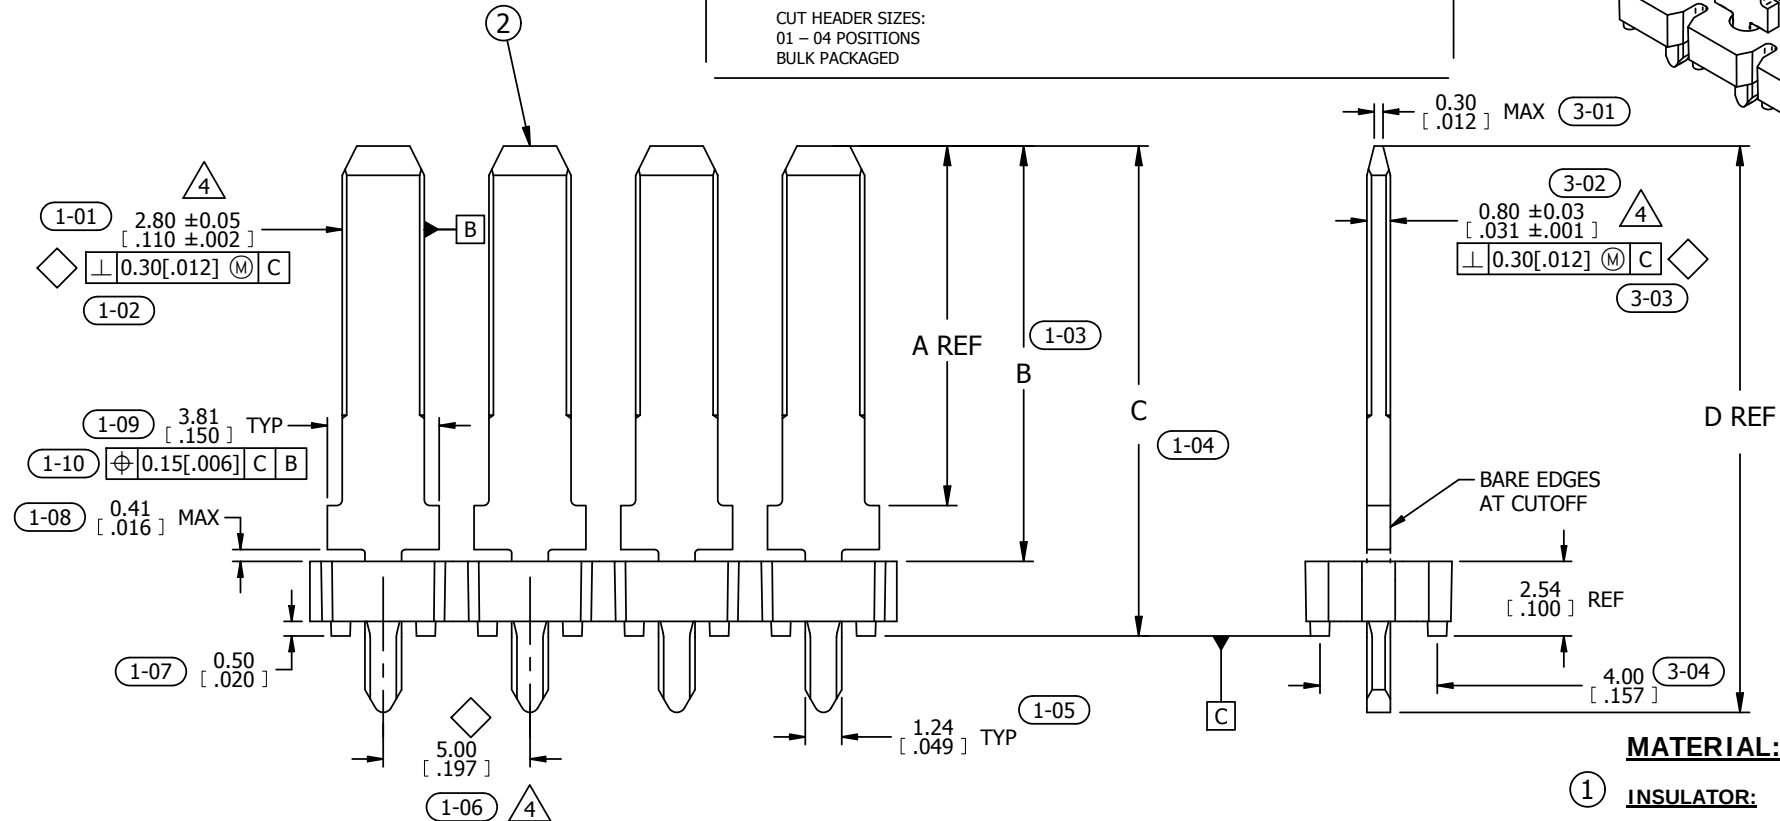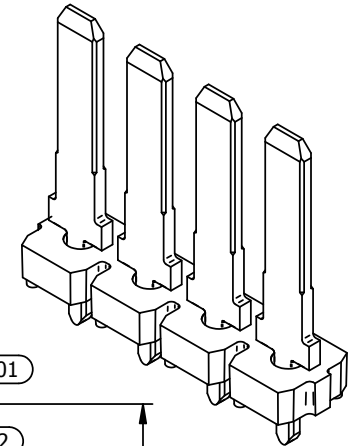

MATERIAL:


- 1 INSULATOR:
HIGH TEMPERATURE THERMOPLASTIC,
FLAMMABILITY RATED: UL 94V-0,
COLOR: BLACK

- 2 TAB:
BRASS C26000


FINISH:

SEE PART NO. / ORDERING CODE


CONFIDENTIAL
CUSTOMER DRAWING

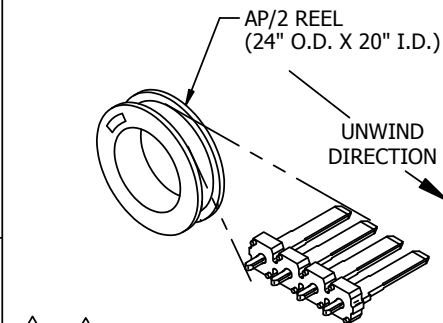

2 5 REELED HEADER POSITION

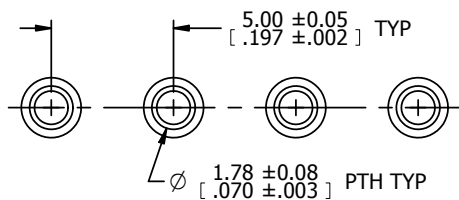

SUGGESTED PCB HOLE PATTERN

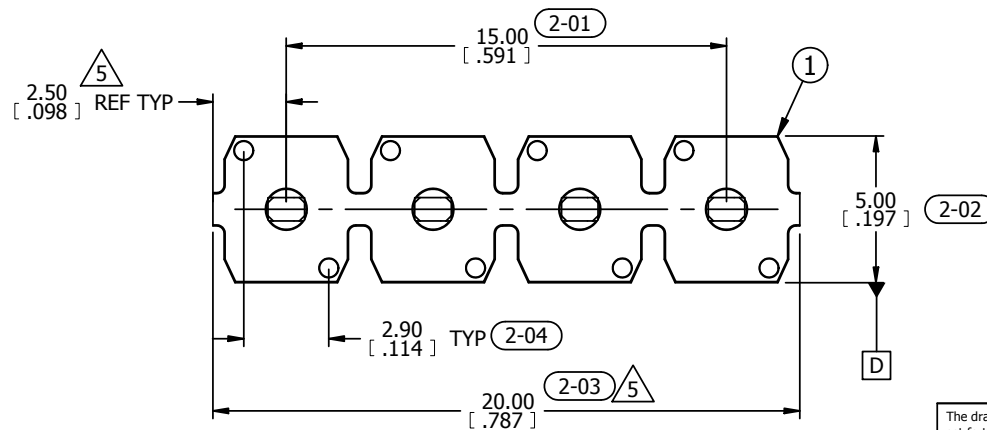

The drawing and the information set forth hereon are the property of AutosplICE, Inc. and are to be held in trust and confidence. Publication, disclosure, or use for any purpose not expressly authorizing in writing by AutosplICE, Inc. is prohibited.

MATERIAL:

2

FINISH:

3

TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS IN (mm) (INCHES)		autosplice		Autosplice, Inc. 10431 Wateridge Circle Suite 110 San Diego, CA 92121-2725 858-535-0077	
DECIMAL: .XX	± 0.2 [.01]	THIRD ANGLE PROJECTION	DRAWN BY	Daenitz	DATE
ANGULAR: ± 3°	± 0.13 [.005]	DATE	ENGINEERED BY	Daenitz	DATE
ITEM NUMBERS FOR INSPECTION	XX	TITLE	AUTOHEADER, 2.8mm TAB, 5mm CTRS		
DENOTES SPECIAL CHARACTERISTIC		SIZE	C	OAE89	REVISION
		SCALE	4:1	SAD NO. C23-1080	SHEET 1 OF 2