

NOTE: UNLESS OTHERWISE SPECIFIED

1. INTERPRET DRAWING IN ACCORDANCE WITH ANSI Y14.5-1982.
2. REMOVED
3. PITCH CONSISTENCY TO BE WITHIN ±.005 OVER 3.000 INCHES.
4. PART TO BE SUPPLIED ON A CONTINUOUS REEL.
5. ALL DIMENSIONS APPLY AFTER PLATING.

PART NUMBER BREAKDOWN


PIN SIZE
 0 = UNDER 1 INCH OAL
 1 = OVER 1 INCH OAL

PIN LENGTH "L"
 PIN LENGTH "P" ABOVE STAR

PIN TYPE (SEE STAR DETAIL)
 4 = ROUND PIN
 5 = ROUND PIN WITH STANDARD STAR

FINISH VARIATIONS
 AA = TIN/LEAD .000120 MIN OVER NICKEL
 BB = GOLD PLATE .000005 OVER NICKEL
 CC = GOLD PLATE .000010 OVER NICKEL
 WW = GOLD PLATE .000015 OVER NICKEL
 DD = GOLD PLATE .000020 OVER NICKEL
 EE = GOLD PLATE .000030 OVER NICKEL

MATERIAL
 2 = BRASS ALLOY
 5 = PHOSPHOR BRONZE ALLOY
 7 = COPPER/NICKEL/TIN ALLOY

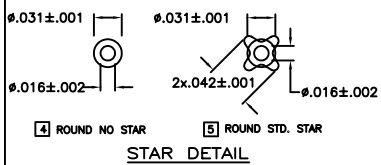

REELING ORIENTATION
 AP/2 REEL
 (24" O.D. x 20" I.D.)

PIN WITH NO STAR

PIN WITH STAR

CUSTOMER DRAWING

REV	REVISION RECORD	DATE	BY	APP'D
A	INITIAL RELEASE			
B	PER ECN 14471			

ALL DIMENSIONS ARE IN INCHES		AUTOSPLICE INC. 20121 Murray Avenue, Brea, CA 92611	
DECIMAL:	XI = ±.01	TITLE	AUTOPIN/2 DETAIL PART DRAWING
XXI = ±.005		DESIGNED BY	MAC M
ANGULAR:	±5°	DRAWN BY	BIANCA
		CHECKED BY	
		DATE	04E89 CB-31[4thru5]000 B