


NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS APPLY AFTER PLATING.
 2. DIMENSION IN FREE STATE.
 3. RECOMMENDED SHIELD THICKNESS = $.006[0.15] + .003[0.08]$
 4. REFER TO THE TABLE "A" FOR STENCIL HOLE SIZE.
- BUT, PAD SIZE MUST BE FIXED ALWAYS AS H=5.20 & V=1.0

TABLE "A"		
STENCIL THICKNESS	(H)	(V)
0.15	4.60	0.8
0.12	5.00	0.9
0.10	5.20	1.0


UNIT : mm

PICK-UP AREA






ISOMETRIC VIEW




12mm TAPE PER E.I.A. STD. 481 , 13" REEL ,
SEE TABLE FOR QTY OF PARTS PER REEL.

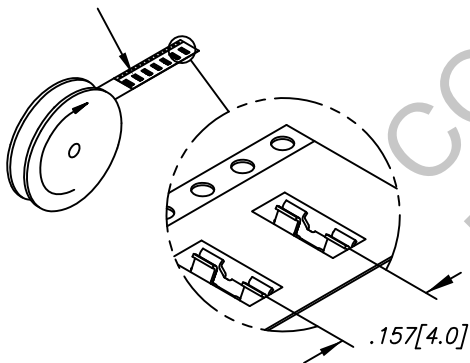

CUSTOMER DRAWING

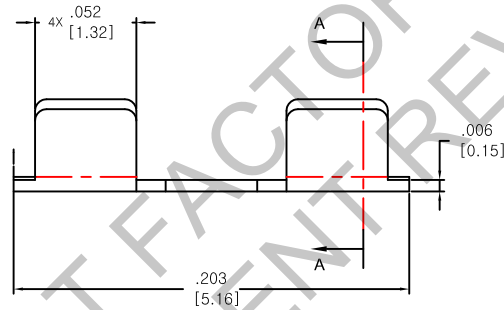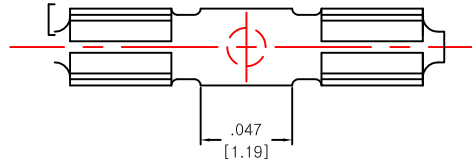

REV	REVISION RECORD	BY	DATE
A	INITIAL RELEASE	Y.J.PARK	2008.09.26
B	ADDED STENCIL HOLE SIZE	Y.J.PARK	2008.11.20
C	CHANGED RECOMMENDED SHIELD THICKNESS	Y.J.PARK	2009.03.04
D	CHANGED PAD SIZE & QUANTITY PER REEL	Y.J.PARK	2009.08.31
E	MODIFIED GAP DIMENSION & TOLERANCE	Y.J.PARK	2009.12.10
F	MODIFIED GAP DIMENSION & TOLERANCE	Y.J.PARK	2010.04.26

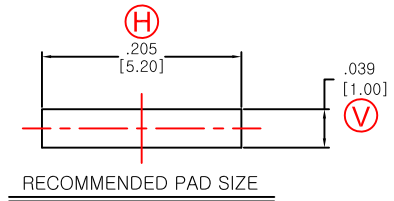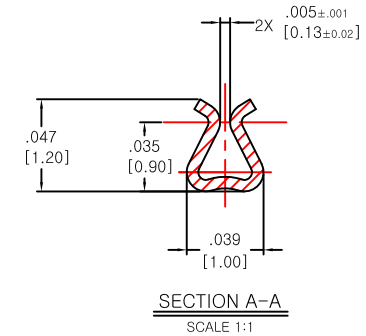

MATERIAL SUS301	HEAT TREAT	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MM. TOLERANCES ARE: 0 ≤ X < 3 : ±0.10 3 ≤ X < 10 : ±0.15 10 ≤ X < 25 : ±0.20 25 ≤ X : ±0.25			AUTOSPlice AUTOSPlice CO., LTD., 117BL 2LOT Namdong Industrial Complex, Incheon, R.O.Korea (82)32- 812-9784		
FINISH POST-TIN (MATTE)	Unit Q'ty 10,000PCS / REEL	PROJECT: _____ DRAWN BY: YJ.PARK DESIGNED BY: YJ.PARK APPROVED BY: BRIAN.LEE			DATE: 2008.09.26 DATE: 2008.09.26 DATE: 2008.09.26		
This drawing and the information set forth hereon are the property of Autosplice, Inc. and are to be held in trust and confidence. Publication, disclosure, or use for any purpose not expressly authorized in writing by Autosplice, Inc. is prohibited.				TITLE: SMT MICRO RFI CLIP(BOTTOM TYPE)			REV: F
SCALE: 1:1				SHEET 1 OF 1			